


Remeo Products Corporation
P.O. Box 488, 468 Rte. 17A, Florida, NY 10921
Phone: 800-431-3864 or 845-651-4431, Fax: 845-651-4160
Email: general@remee.com Web: www.remee.com



Remeo & RF Connectors

Cross Reference

Cable to Connector Cross Reference

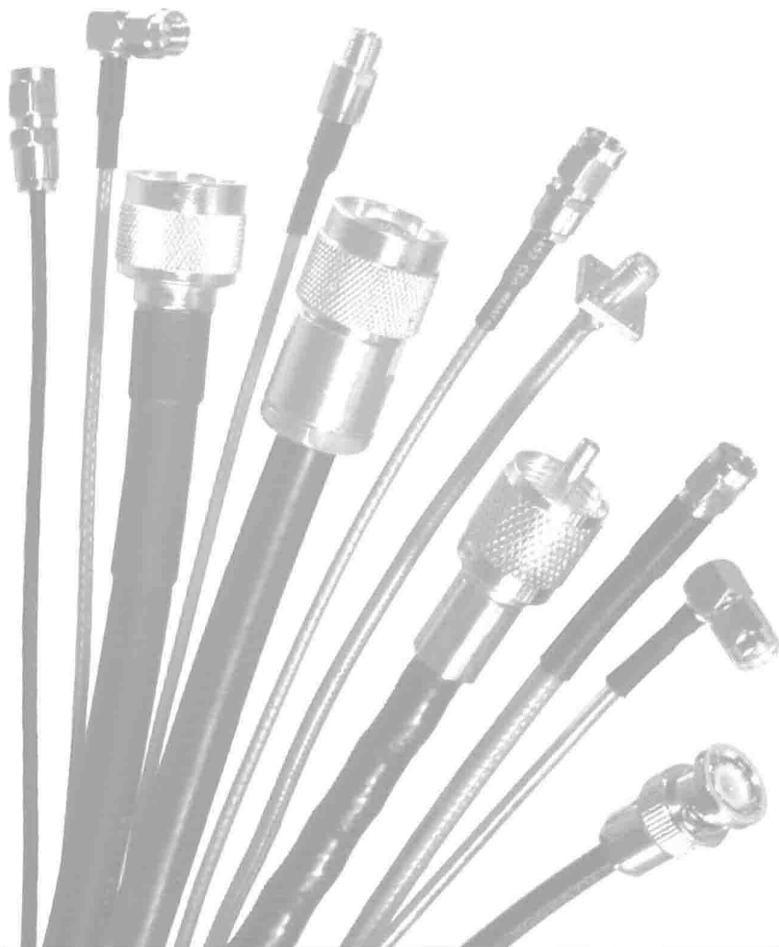

RF Connectors, Division of RF Industries, 7610 Miramar Road, San Diego, CA 92126-4202
For product information call (800) 233-1728 or (858) 549-6340, Fax: (858) 549-6345
E-mail: rfi@rfindustries.com Web: www.rfindustries.com



HOW TO USE THIS MANUAL

This manual is organized first by REMEE PRODUCTS Cable groups and then by the types of RFI connectors available for each group. The connector lists are divided into subgroups by interface type.

Each connector listing contains the RFI part number, the description and the materials used for each connector. The materials listings consist of the body, shell, pin/contact, and dielectric.

The Cable Number Locator below is supplied for easy cross-referencing by cable part number to page number.

Example:

You need to know if RFI has an N Male Clamp Solder Plug for REMEE PRODUCTS 1520 cable.

*Refer to the table below for **REMEE PRODUCTS 1520**. Go to page 6. Under the heading for **REMEE PRODUCTS 1500, 1520, 1521, 1522, 1524, 1525, 1526, 1527, 1540, 1550, 1560, 1570, 1590, 1591, 1592, 1593, 1594, 1694** you will find **RFN-1904-1N** and **RFN-1904-1S**.*

From the description and the materials information you are able to determine if one of these connectors works for your application. The legend on page two explains the material codes used in this manual.

Part numbers with an (*) are special order only. If you have special requirements, please contact RF Industries' sales department for assistance.

Cable Number Locator

Cable #	Page #	Cable #	Page #	Cable #	Page #	Cable #	Page #	Cable #	Page #
1300	8	1510	7	1561	10	1584	10	1694	6
1310	8	1510/95	7	1561/MES	10	1585	10	8100	8
1315	8	1520	6	1563	10	1586	10	725102	8
1330	9	1521	6	1564	10	1586/MES	10	725104	7
1350	8	1522	6	1565	10	1588	8	725106	7
1360	9	1524	6	1570	6	1589	8	725110	7
1400	4	1525	6	1571	7	1590	6	725526	8
1420	4	1526	6	1572	7	1591	6	725105	10
1450	4	1527	6	1574	10	1592	6	725105/60	10
1460	4	1531	10	1574/60	10	1593	6	725105/95BC	10
1470	4	1535	7	1578	8	1594	6	725107	10
1480	4	1540	6	1579	8	1595	2	P725111	9
1490	4	1550	6	1580	10	1600	10		
1500	6	1560	6	1582	10	1660	4		

* Special Order
0602

The information found in this guide was compiled using specifications that were current at the time of compilation. Please note that manufacturer's specifications are subject to change without notice. We therefore suggest that after using this guide to make your initial connector selections, you should obtain the latest product specifications from this cable manufacturer and RF Industries.

BELDEN & RF INDUSTRIES CABLE TO CONNECTOR CROSS REFERENCE

Legend			
BODY PLATING	SHELL PLATING	PIN/CONTACT	DIELECTRIC
C - Chrome	C - Black Chrome	G - Gold	B - Bakelite, Dap, Phenolic
G - Gold	G - Gold	N - Nickel	D - Delrin, Polypropylene
N - Nickel	N - Nickel	S - Silver	T - Teflon
S - Silver	S - Silver		
SS - Stainless Steel	SS - Stainless Steel		

Remee 1595

PART NUMBER	DESCRIPTION	BODY	SHELL	P/C	DIE
1.0/2.3					
RF123-7000-B	1.0/2.3 Series Male Snap-On Crimp Plug	N	---	G	T
RF123-7001-B	1.0/2.3 Series Male Slide-On Crimp Plug	N	---	G	T
RF123-7002-B	1.0/2.3 Series Male Screw-On Crimp Plug	N	---	G	T
RF123-7050-1B	1.0/2.3 Series Female Slide-On Crimp Jack	G	---	G	T
RF123-7052-1B	1.0/2.3 Series Female Crimp Bulkhead Jack	G	---	G	T
BNC					
RFB-1100-B	BNC Male Clamp Solder Plug	N	N	G	T
RFB-1106-5	BNC Male Crimp Plug (Large Ferrule)	N	N	G	T
RFB-1106-6	BNC Male Crimp Plug (Small Ferrule)	N	N	G	T
RFB-1110-B	BNC Male R/A Crimp Plug	N	N	G	T
RFB-1116-B-03	BNC Female Crimp Front-Mount Bulkhead Jack	N	---	G	T
RFB-1117-BT	BNC Female Crimp Rear-Mount Bulkhead, Panel Thickness .200	N	---	G	T
RFB-1117-BT-03	BNC Female Crimp Rear-Mount Bulkhead, Panel Thickness .140	N	---	G	T
RFB-1123-B	BNC Female Crimp Socket Jack	N	---	G	T
FME					
RFE-6000-B	FME Male Crimp Plug	N	N	G	T
MM					
RFM-2100-1	MM Male Crimp Plug	S	---	S	T
N					
RFN-1005-B-03	N Male Crimp Plug	N	N	G	T
RFN-1009-B-03*	N Male Right Angle Crimp Plug, Square Body	N	N	G	T
RFN-1022-18	N Female Crimp Bulkhead Rear-Mount Jack	N	---	G	T
RFN-1022-8	N Female Crimp Bulkhead Rear-Mount Jack w/ O-Ring	N	---	G	T
RFN-1027-B	N Female Crimp Jack	S	---	G	T
Modified Shell TNC					
RFS-2002	Modified TNC Male Clamp Plug w/ Extended Threads	N	---	G	D
TNC					
RFT-1201-1B*	TNC Male Clamp Plug	N	N	G	T

* Special Order
0602

Remee Products & RF Industries Cable To Connector Cross Reference vol. 5

PART NUMBER	DESCRIPTION	BODY	SHELL	P/C	DIE
RFT-1202-3	TNC Male Crimp Plug	N	N	G	D
RFT-1212-B	TNC Female Crimp Rear-Mount Bulkhead	N	---	G	D
Mini-UHF					
RFU-600-3	Mini-UHF Male Crimp Plug	N	N	G	T
RFU-600-10B*	Mini-UHF Male Right Angle Crimp Plug	N	N	G	T
RFU-601-3	Mini-UHF Female Crimp Jack	N	---	G	T
RFU-617-01	Mini-UHF Female Crimp Rear-Mount Bulkhead with Hardware	N	---	G	D
RFU-617-B	Mini-UHF Female Crimp Rear-Mount Bulkhead	N	---	G	D
MC Card					
RMC-6000-B*	MC Card Straight Crimp Plug	N	---	G	T
RMC-6010-B	MC Card Right Angle Crimp Plug	N	---	G	T
MCX					
RMX-8000-B	MCX Male Crimp Plug	N	---	G	T
RMX-8000-1B	MCX Male Crimp Plug	G	---	G	T
RMX-8010-B	MCX Male Right Angle Crimp Plug	N	---	G	T
RMX-8010-1B	MCX Male Right Angle Crimp Plug	G	---	G	T
MMCX					
RMX-9000-1B	MMCX Male Crimp Plug	G	---	G	T
RMX-9010-1B	MMCX Male Right Angle Crimp Plug	G	---	G	T
RMX-9050-1B	MMCX Female Crimp Jack	G	---	G	T
Reverse Polarity					
RP-1117-BT	BNC Reverse Polarity Crimp Bulkhead Jack (Male Contact)	N	N	G	T
RP-1202-1B	TNC Reverse Polarity Crimp Plug (Female Contact)	N	N	G	T
RP-1212-B	TNC Reverse Polarity Rear-Mount Crimp B/H Jack (Male Contact)	N	N	G	T
RP-1216-B	TNC Reverse Polarity Crimp Jack (Male Contact)	N	---	G	T
RP-3000-B	SMA Reverse Polarity Crimp Plug (Female Contact)	N	N	G	T
RP-3000-1B	SMA Reverse Polarity Crimp Plug (Female Contact)	G	G	G	T
RP-3010-1B	SMA Reverse Polarity Right Angle Crimp Plug (Female Contact)	G	G	G	T
RP-3050-1B	SMA Reverse Polarity Female Crimp Jack (Male Contact)	G	G	G	T
RP-3252-1B	SMA Reverse Polarity Crimp Bulkhead Jack (Male Contact)	G	G	G	T
RP-4252-B	SMB Reverse Polarity Crimp Bulkhead Jack (Female Contact)	N	---	G	T
SMA					
RSA-3000-1B	SMA Male Crimp Plug	G	G	G	T
RSA-3000-B	SMA Male Crimp Plug	N	N	G	T
RSA-3000-B-SS	SMA Male Crimp Plug	SS	SS	G	T
RSA-3000-1B-03	SMA Male Crimp Plug	G	SS	G	T
RSA-3000-7-B*	SMA Male Crimp Plug	SS	SS	G	T
RSA-3010-1B	SMA Male Right Angle Crimp Plug	G	G	G	T
RSA-3010-1B-04	SMA Male Right Angle Crimp Plug	G	SS	G	T
RSA-3010-B	SMA Male Right Angle Crimp Plug	N	N	G	T
RSA-3010-B-SS	SMA Male Right Angle Crimp Plug	SS	SS	G	T
RSA-3050-1B	SMA Female Crimp Jack	G	G	G	T
RSA-3050-B	SMA Female Crimp Jack	N	N	G	T
RSA-3100-B	SMA Male Clamp Solder Plug	N	N	G	T
RSA-3110-B	SMA Male Right Angle Clamp Plug	N	N	G	T
RSA-3252-B	SMA Female Bulkhead, W/O Gasket	N	N	G	T
RSA-3252-B-03	SMA Female Bulkhead, W/ Gasket	N	N	G	T
SMB					
RSB-4000-B	SMB Crimp Plug	N	---	G	T
RSB-4000-B-03	SMB Crimp Plug (See Catalog)	N	---	G	T

* Special Order
0602

Remee Products & RF Industries Cable To Connector Cross Reference vol. 5

RSB-4000-1B	SMB Crimp Plug	G	---	G	T
RSB-4010-B	SMB Right Angle Crimp Plug	N	---	G	T
RSB-4010-1B	SMB Right Angle Crimp Plug	G	---	G	T
RSB-4050-B	SMB Crimp Jack	N	---	G	T
PART NUMBER	DESCRIPTION	BODY	SHELL	P/C	DIE
RSB-4050-1B	SMB Crimp Jack	G	---	G	T
RSB-4055-1B	SMB Right Angle Crimp Jack	G	---	G	T
RSB-4100-B	SMB Clamp Plug	N	---	G	T
RSB-4252-B	SMB Jack, Crimp Bulkhead, Rear-Mount, W/ D-Flat	N	---	G	T
Reverse Thread					
RT-3252-1B-04	SMA Reverse Thread Female Crimp	N	---	G	T

Remee 1400, 1420, 1450, 1460, 1470, 1480, 1490, 1660

PART NUMBER	DESCRIPTION	BODY	SHELL	P/C	DIE
BNC					
RFB-1100-2	BNC Male Clamp Solder Plug (Captive Pin); UG-88D/U	N	N	G	D
RFB-1100-2ST	BNC Clamp Solder Plug(Captive Pin); UG-88/U, C/U, D/U,E/U	S	S	G	T
RFB-1102-T	BNC Male Solderless Plug	N	N	S	T
RFB-1104	BNC Male Twist-on Plug	N	N	S	D
RFB-1106-2	BNC Male Crimp Plug; UG-1785/U	N	N	G	D
RFB-1106-2ST	BNC Male Crimp Plug; UG-1785/U	S	S	G	T
RFB-1106-2T	BNC Male Crimp Plug; UG-1785/U	N	N	G	T
RFB-1106-9	BNC Male Q/D Univ. Crimp Plug; for BNC, TNC, & N Female	N	N	G	D
RFB-1106-C-03	BNC Male Crimp with BeCu Contact	N	N	G	D
RFB-1110-C-04	BNC Male Right Angle Clamp Plug	S	S	G	T
RFB-1110-S	BNC Male Right Angle Solder Plug; UG-913/U, A/U	S	S	S	T
RFB-1110-1	BNC Male Right Angle Crimp Plug	N	N	G	T
RFB-1110-C-04	BNC Male Right Angle Clamp Plug	S	S	G	T
RFB-1117	BNC Female Crimp Bulkhead Jack	N	---	G	D
RFB-1121	BNC Female Twist-on Jack	N	---	S	D
RFB-1123-1	BNC Female Crimp Jack	N	---	G	T
RFB-1160	BNC Wall Plate Flush Mount Crimp Jack	N	---	G	D
RFB-1161	BNC Wall Plate Flush Mount Twist on Jack	N	---	G	D
7/16 Din					
RFD-1600-2-C	7/16 Din Male Clamp Plug Combo Straight or Right Angle	S	S	S	T
RFD-1605-2-C	7/16 Din Male Crimp Plug Combo Straight or Right Angle	S	S	S	T
RFD-1625-2-C	7/16 Din Female Clamp Jack Combo Straight or Right Angle	S	---	S	T
RFD-1630-2-C	7/16 Din Female Crimp Jack Combo Straight or Right Angle	S	---	S	T
RFD-1641-2-C*	7/16 Din Female 4-Hole Flange Clamp Panel Mount, Combo Straight or Right Angle	S	---	S	T
RFD-1642-2-C*	7/16 Din Female 4-Hole Flange Crimp Panel Mount, Combo Straight or Right Angle	S	---	S	T
FME					
RFE-6000-C	FME Male Crimp	N	---	G	T
RFE-6000-6C*	FME Male Crimp, Black	C	---	G	T
RFE-6050-C	FME Female Crimp	N	---	G	T
RFE-6050-6C*	FME Female Crimp, Black	C	---	G	T
N					
RFN-1000-N	N Male Solder Clamp Plug; UG-536 B/U	N	N	G	T
RFN-1000-1S	N Male Solder Clamp Plug; UG-536 A/U	S	S	G	T
RFN-1001-S	N Male Solder Plug	S	S	G	T

* Special Order
0602

RFN-1005-2N	N Male Crimp Plug	N	N	G	T
RFN-1005-3C	N Male Crimp Plug	S	S	G	T
RFN-1005-5	N Male Crimp Plug (Quick Disconnect)	S	S	G	T
RFN-1009-C	N Male Right Angle Crimp Plug	S	S	G	T
RFN-1009-C-03	N Male Right Angle Crimp Plug, Square Body	S	S	G	T
RFN-1021-6	N Female Chassis, 4-Hole Flange, Solder Clamp	S	---	G	T
PART NUMBER	DESCRIPTION	BODY	SHELL	P/C	DIE
RFN-1022-8-C	N Female Crimp Blkhd, Rear Mount w/ O-Ring, for RG-58/U	N	---	G	T
RFN-1025-1	N Female Cable Clamp Jack; UG-536B/U	S	---	G	T
RFN-1027	N Female Crimp Cable Jack	S	---	G	T
Modified Shell SMA					
RFS-2006	SMA Male Right Angle Crimp with Modified Shell	N	---	G	T
TNC					
RFT-1200	TNC Male Clamp Solder Plug; MS39012/26-0101	N	N	S	T
RFT-1202-2	TNC Male Crimp Plug (Captive Pin); MS39012/26-0011	N	N	G	D
RFT-1202-2B	TNC Male Crimp Plug (Black Body); MS39012/26-001	C	C	G	D
RFT-1202-2T	TNC Male Crimp Plug (Captive Pin); MS39012/26-0011	N	N	G	T
RFT-1202-5	TNC Male Crimp Plug; (Quick Disconnect)	N	N	G	D
RFT-1204	TNC Male Solderless Plug	N	N	S	D
RFT-1206	TNC Male Twist on Plug; AMP 2221983-7	N	N	S	D
RFT-1212	TNC Female Crimp Bulkhead Jack; MS39012/23329/4-14	N	---	G	D
RFT-1214	TNC Female Twist on Cable Jack	N	---	S	D
RFT-1216-1	TNC Female Crimp Cable Jack; MS39012/27-0504	N	---	G	D
RFT-1218	TNC Male R/A Crimp Plug; MS39012/30-0504	N	N	G	T
UHF					
RFU-500	UHF Solder Plug; PL-259; Use with RFU-530 Reducer	S	N	S	Dap
RFU-501	UHF Solder Plug; PL-259; Use with RFU-530-S Reducer	S	S	S	T
RFU-504	UHF Male Push on Ferrule (No Installation Tools); PL-259	N	N	S	Dap
RFU-505	UHF Male Crimp Plug	N	N	S	Dap
RFU-505-ST	UHF Male Crimp Plug	S	S	S	T
RFU-505-5	UHF Male Crimp Plug (Short Crimp)	N	N	N	D
RFU-520	UHF Female Cable Clamp Jack	N	---	S	T
RFU-527	UHF Female Crimp	N	N	S	D
RFU-527-T	UHF Female Crimp Jack	N	---	S	T
RFU-530	Adapter/Reducer; Use with RFU-500	N	---	---	---
RFU-530-S	Adapter/Reducer; Use with RFU-501	S	---	---	---
RFU-530-Z*	Adapter/Reducer; Use with RFU-500 & 501	N	---	---	---
Mini-UHF					
RFU-600	Mini-UHF Push-on Ferrule Plug (No Installation Tools Needed)	N	N	S	T
RFU-600-1	Mini-UHF Male Crimp Plug; (AMP Drawn Metal Type)	N	N	S	D
RFU-600-2	Mini-UHF Male Crimp Plug, Short, Black Chrome; Onaglass Antennas	C	C	G	D
RFU-600-5	Mini-UHF Male Crimp Plug (Quick Disconnect)	N	N	G	D
RFU-600-6	Mini-UHF Male Crimp Plug; AMP 2266-001, Amphenol 81-115	N	N	S	D
RFU-600-10C	Mini-UHF Male R/A Crimp Plug	N	N	G	T
RFU-601-1	Mini-UHF Female Crimp Jack	N	---	G	D
RFU-617-C	Mini-UHF Female Crimp Rear Mount Bulkhead Jack	N	---	G	D
Reverse Polarity					
RP-1005-C	N Reverse Polarity Male Crimp Plug (Female Contact)	N	N	G	T
RP-1106-C	BNC Reverse Polarity Male Crimp Plug (Female Contact)	N	N	G	T

Remeo Products & RF Industries Cable To Connector Cross Reference vol. 5

RP-1117-C	BNC Reverse Polarity Crimp Bulkhead Jack (Male Contact)	N	---	G	T
RP-1202-C	TNC Reverse Polarity Male Crimp Plug (Female Contact)	N	N	G	T
RP-1212-C	TNC Reverse Polarity Crimp Bulkhead Jack (Male Contact)	N	---	G	T
RP-3000-C	SMA Reverse Polarity Male Crimp Plug (Female Contact)	N	N	G	T
RP-3000-1C	SMA Reverse Polarity Male Crimp Plug (Female Contact)	G	G	G	T
RP-3010-1C	SMA Reverse Polarity R/A Crimp Plug (Female Contact)	G	G	G	T
RP-3050-1C	SMA Reverse Polarity Crimp Jack (Male Contact)	N	---	G	T

PART NUMBER	DESCRIPTION	BODY	SHELL	P/C	DIE
RP-3252-1C	SMA Reverse Polarity Crimp Bulkhead Jack (Male Contact)	G	---	G	T
SMA					
RSA-3000-C	SMA Male Crimp Plug	N	N	G	T
RSA-3000-1C	SMA Male Crimp Plug, Three Piece	N	G	G	T
RSA-3010-C	SMA Male R/A Crimp Plug	N	N	G	T
RSA-3050-C	SMA Female Crimp	N	---	G	T
RSA-3060-C*	SMA Female Right Angle Crimp Jack	N	---	G	T
RSA-3100-C	SMA Male Clamp Solder Plug	N	N	G	T
RSA-3110-C	SMA Male Right Angle Clamp Plug	N	N	G	T
RSA-3220-C*	SMA Male Crimp Bulkhead, 2-Hole Flange	N	N	G	T
RSA-3230-C*	SMA Male Crimp Bulkhead, 4-Hole Flange	N	N	G	T
RSA-3252-1C*	SMA Female Crimp Bulkhead	G	---	G	T
RSA-3252-C	SMA Female Crimp Bulkhead	N	---	G	T
RSA-3260-C	SMA Female Crimp Bulkhead, 2-Hole Flange	N	---	G	T
RSA-3270-C	SMA Female Crimp Bulkhead, 4-Hole Flange	N	---	G	T
Reverse Thread					
RT-1005-C	N Reverse Thread Male Crimp Plug	N	N	G	T
RT-1009-C-03	N Reverse Thread Right Angle Male Crimp Plug	N	N	G	T
RT-1200-C	TNC Reverse Thread Male Clamp Plug	N	N	S	T
RT-1202-C	TNC Reverse Thread Male Crimp Plug	N	N	G	D
RT-3000-1C	SMA Reverse Thread Male Crimp Plug	N	N	G	T

Remeo 1500, 1520, 1521, 1522, 1524, 1525, 1526, 1527, 1540, 1550, 1560, 1570, 1590, 1591, 1592, 1593, 1594, 1694

PART NUMBER	DESCRIPTION	BODY	SHELL	P/C	DIE
BNC					
RFB-1701-D	BNC Male Clamp Plug	N	N	G	T
RFB-1705	BNC Male Twist-on Plug	N	N	S	D
RFB-1706-9	BNC Male Crimp Plug (Quick Disconnect)	N	N	G	D
RFB-1707-D	BNC Male Crimp Plug	N	N	G	T
RFB-1707-2	BNC Male Crimp Plug; UG-1789/U	N	N	G	D
RFB-1709-D*	BNC Male Right Angle Clamp Plug	N	N	G	T
RFB-1710-D	BNC Male Right Angle Crimp Plug	N	N	G	T
RFB-1710-D-05*	BNC Male Right Angle Twist On Plug	N	N	G	T
RFB-1717	BNC Female Crimp Rear Mount Bulkhead Jack	N	---	G	D
RFB-1717-D	BNC Female Crimp Rear Mount Bulkhead Jack	N	---	G	T
RFB-1720	BNC Female Solder Clamp Socket; UG-261/U	N	---	S	T
RFB-1720-D*	BNC Female Clamp Jack	N	---	G	T
RFB-1722	BNC Female Twist-on Socket Jack	N	---	S	D
RFB-1724	BNC Female Crimp Jack	N	---	G	D
RFB-1724-D	BNC Female Crimp Jack	N	---	G	T
RFB-1760	BNC Wall Plate Flush Mount Crimp Jack	N	---	G	D
RFB-1761	BNC Wall Plate Flush Mount Twist-on Jack	N	---	G	D

* Special Order
0602

Phone: (800) 233-1728, (858) 549-6340; Fax: (858) 549-6345
Web: www.rfindustries.com; Email: sales@rfindustries.com

Mini Bayonet					
PART NUMBER	DESCRIPTION	BODY	SHELL	P/C	DIE
RFM-2000	Mini-Bayonet Female Crimp Cable Jack; Kings KM-59-23	N	---	G	T
N					
RFN-1001-S	N Male Solder Plug	S	S	G	T
RFN-1904-1N	N Male Clamp Solder Plug; UG-603/U, A/U	N	N	G	T
RFN-1904-1S	N Male Clamp Solder Plug; UG-603/U, A/U	S	S	G	T
RFN-1907-2S	N Male Crimp Plug	S	S	G	T

PART NUMBER	DESCRIPTION	BODY	SHELL	P/C	DIE
TNC					
RFT-1801*	TNC Male Clamp Solder Plug	N	N	S	T
RFT-1803-1	TNC Male Crimp Plug (Captive Pin); MS39012/26-0012	N	N	G	D
RFT-1805	TNC Male Solderless Plug; Amphenol 31-5061	N	N	S	D
RFT-1807	TNC Male Twist on Plug; AMP 221983-1	N	N	S	D
RFT-1813	TNC Female Crimp Bulkhead; MS39012/28-0012	N	---	G	D
RFT-1815	TNC Female Twist on Cable Jack	N	---	S	D
UHF					
RFU-500	UHF Solder Plug; PL-259; Use with RFU-531 Reducer	S	N	S	Dap
RFU-501	UHF Solder Plug; PL-259; Use with RFU-531-S Reducer	S	S	S	T
RFU-506	UHF Male Crimp Plug	N	N	S	Dap
RFU-520-D-03	UHF Female Clamp Jack	N	---	G	T
RFU-531	Adapter/Reducer; Use with RFU-500	N	N	---	---
RFU-531-S	Adapter/Reducer; Use with RFU-501	---	S	---	---
RFU-531-Z*	Adapter/Reducer; Use with RFU-501	---	S	---	---
Mini-UHF					
RFU-601-5	Mini-UHF Female Crimp Jack	N	---	S	T
MHV					
RHV-100-D	Medium High Voltage Male Clamp Plug	N	N	G	T
RHV-106-D	Medium High Voltage Male Crimp Plug	N	N	G	T
RHV-124-D	Medium High Voltage Female Clamp Jack	N	---	G	T

Remee 1510, 1510/95, 1535, 1571, 1572, 725104, 725110

PART NUMBER	DESCRIPTION	BODY	SHELL	P/C	DIE
BNC					
RFB-1707-D1	BNC Male Crimp Plug	N	N	G	T
RFB-1717-D1*	BNC Female Crimp Rear Mount Bulkhead Jack	N	---	G	T

Remee 725106

PART NUMBER	DESCRIPTION	BODY	SHELL	P/C	DIE
BNC					
RFB-1707-D2	BNC Male Crimp Plug	N	N	G	T
RFB-1717-D2*	BNC Female Crimp Rear Mount Bulkhead Jack	N	---	G	T

Remee 725102, 725526

PART NUMBER	DESCRIPTION	BODY	SHELL	P/C	DIE
BNC					
RFB-1707-D3*	BNC Male Crimp Plug	N	N	G	T

* Special Order
0620

RFB-1717-D3*	BNC Female Crimp Rear Mount Bulkhead Jack	N	---	G	T
--------------	---	---	-----	---	---

Remee 1300, 1310, 1315, 1350, 1578, 1588, 1589, 8100

PART NUMBER	DESCRIPTION	BODY	SHELL	P/C	DIE
BNC					
RFB-1101-1EN	BNC Male Clamp Solder Plug; UG-959A/U	N	N	G	D
7/16 Din					
RFD-1600-2-E	Male Clamp Combination Connector Straight or Right Angle	S	S	S	T
RFD-1605-2-E	Male Crimp Combination Connector Straight or Right Angle	S	S	S	T
PART NUMBER	DESCRIPTION	BODY	SHELL	P/C	DIE
RFD-1625-2-E	Female Clamp Combination Connector Straight or Right Angle	S	---	S	T
RFD-1630-2-E	Female Crimp Combination Connector Straight or Right Angle	S	---	S	T
RFD-1641-2-E*	Female 4 Hole Flange Clamp Combination Connector Straight or Right Angle	S	---	S	T
RFD-1642-2-E*	Female 4 Hole Flange Crimp Combination Connector Straight or Right Angle	S	---	S	T
N					
RFN-1001-S	N Male Solder Plug	S	S	G	T
RFN-1002-1N	N Male Solder Clamp Plug	N	N	G	T
RFN-1002-1S	N Male Solder Clamp Plug	S	S	G	T
RFN-1006-3E	N Male Crimp Plug; UG-1681/U	S	S	G	T
RFN-1008-3E	N Male Right Angle Clamp Plug	S	S	G	T
RFN-1009-3E	N Male Right Angle Crimp Plug	S	S	G	T
RFN-1021-7*	N Female 4-Hole Flange Panel Mount Clamp	S	---	G	T
RFN-1024-1	N Female Cable Clamp Jack; UG-23D/U, F/U	S	---	G	T
RFN-1028	N Female Crimp Jack	S	---	G	T
TNC					
RFT-1218-E*	TNC Male Right Angle Crimp Plug	N	N	G	T
RFT-1219-E	TNC Male Right Angle Clamp Plug	N	N	G	T
UHF					
RFU-500	UHF Solder Plug; PL-259	S	N	S	Dap
RFU-501	UHF Solder Plug; PL-259	S	S	S	T
RFU-503	UHF Male, Waterproof Plug (w/ Silicon Rubber O-Rings / Seals); PL-259	N	N	S	T
RFU-507	UHF Male Crimp Plug	N	N	S	Dap
RFU-507-S	UHF Male Crimp Plug	S	S	S	Dap
RFU-507-ST	UHF Male Crimp Plug	S	S	S	T
RFU-520-1E	UHF Female Cable Clamp Jack	N	---	S	T
MHV					
RHV-100-E	Medium High Voltage Male Clamp Plug	N	N	G	T

Remee 1579

PART NUMBER	DESCRIPTION	BODY	SHELL	P/C	DIE
N					
RFN-1001-S	N Male Solder Plug	S	S	G	T
PART NUMBER	DESCRIPTION	BODY	SHELL	P/C	DIE
RFN-1006-3F	N Male Crimp Plug; UG-1682/U	S	S	G	T
RFN-1009-3F	N Male R/A Crimp Plug	S	S	G	T
UHF					

* Special Order
0602

RFU-500	UHF Solder Plug; PL-259	S	N	S	Dap
RFU-501	UHF Solder Plug; PL-259	S	S	S	T
RFU-503	UHF Male, Waterproof Plug (w/ Silicon Rubber O-Rings / Seals); PL-259	N	N	S	T
RFU-507-STF	UHF Male Crimp Plug	S	S	S	T
RFU-520-1E	UHF Female Cable Clamp Jack	N	---	S	T

Remee 1330, 1360

PART NUMBER	DESCRIPTION	BODY	SHELL	P/C	DIE
BNC					
RFB-1101-1SI	BNC Male Clamp Plug	S	S	G	T

PART NUMBER	DESCRIPTION	BODY	SHELL	P/C	DIE
7/16 Din					
RFD-1600-2-E	7/16 Din Male Clamp Plug Combo Straight or Right Angle	S	S	S	T
RFD-1604-2I	7/16 Din Male Crimp Plug Combo Straight or Right Angle	S	S	S	T
RFD-1605-2-E	7/16 Din Male Crimp Plug Combo Straight or Right Angle	S	S	S	T
RFD-1625-2-E	7/16 Din Female Clamp Jack Combo Straight or Right Angle	S	---	S	T
RFD-1630-2-E	7/16 Din Female Clamp Jack Combo Straight or Right Angle	S	---	S	T
RFD-1641-2-E*	7/16 Din Female 4 Hole Flange Clamp Jack Combo Straight or Right Angle	S	---	S	T
RFD-1642-2-E*	7/16 Din Female 4 Hole Flange Crimp Jack Combo Straight or Right Angle	S	---	S	T

N

RFN-1001-S	N Male Solder Plug	S	S	G	T
RFN-1002-1SI	N Male Solder Clamp Plug	S	S	G	T
RFN-1006-3I	N Male Crimp Plug; UG-1681/U	S	S	G	T
RFN-1009-3I	N Male Right Angle Crimp Plug	S	S	G	T
RFN-1024-1SI	N Female Cable Clamp Jack; UG-23D/U, F/U	S	---	G	T
RFN-1028-SI	N Female Crimp Cable Jack; UG-1688/U	S	---	G	T

TNC

RFT-1201-I*	TNC Male Clamp Plug	N	N	G	T
RFT-1201-SI	TNC Male Clamp Plug	S	S	G	T
RFT-1214-I	TNC Female Clamp Jack	N	---	G	T

UHF

RFU-500	UHF Male Solder Plug	S	N	S	Dap
RFU-501	UHF Male Solder Plug	S	S	S	T
RFU-503	UHF Male Clamp Plug, Waterproof w/Silicon Rubber O-Rings	N	N	S	T
RFU-507-SI	UHF Male Crimp Plug	S	S	S	T
RFU-520-I*	UHF Female Clamp Jack	N	---	S	T

Reverse Polarity

RP-1006-3I	N Reverse Polarity Male Crimp Plug	N	N	G	T
RP-1028-I	N Reverse Polarity Female Crimp Jack	N	N	G	T
RP-1202-I	TNC Reverse Polarity Male Crimp Plug	N	---	G	T
RP-1216-I	TNC Reverse Polarity Female Crimp Jack	N	---	G	T
RP-3000-I	SMA Reverse Polarity Male Crimp Plug	N	N	G	T

SMA

RSA-3000-I	SMA Male Crimp Plug	N	N	G	T
-------------------	---------------------	---	---	---	---

* Special Order
0602

Remee P725111

PART NUMBER	DESCRIPTION	BODY	SHELL	P/C	DIE
BNC					
RFB-1107-7	BNC Male Crimp Plug; for Motorola White Teflon	N	N	G	T
N					
RFN-1005-7	N Male Crimp Plug; for Motorola White Teflon	S	S	G	T
TNC					
RFT-1202-7	TNC Male Crimp Plug; for Motorola White Teflon	N	N	G	D
RFT-1202-7T	TNC Male Crimp Plug; for Motorola White Teflon	N	N	G	T
Mini-UHF					
RFU-600-7	Mini-UHF Male Crimp Plug; for Motorola White Teflon	N	N	G	T

PART NUMBER	DESCRIPTION	BODY	SHELL	P/C	DIE
SMA					
RSA-3010-7	SMA Male Right Angle Crimp Plug; for Motorola White Teflon	N	N	G	T

Remee 1531, 1561, 1561/MES, 1563, 1564, 1565, 1574, 1574/60, 1580, 1585, 725105

PART NUMBER	DESCRIPTION	BODY	SHELL	P/C	DIE
BNC					
RFB-1707-Q	BNC Male Crimp Plug	N	N	G	T
RFB-1710-Q	BNC Male Right Angle Crimp Plug	N	N	G	T
RFB-1717-Q	BNC Female Crimp Rear Mount Bulkhead Jack	N	---	G	T
RFB-1724-Q	BNC Female Crimp Jack	N	---	G	T
TNC					
RFT-1803-Q	TNC Male Crimp Plug	N	N	G	D

Remee 725105/60, 725105/95BC

PART NUMBER	DESCRIPTION	BODY	SHELL	P/C	DIE
BNC					
RFB-1707-Q1	BNC Male Crimp Plug	N	N	G	T

Remee 1582, 1584, 1586, 1586/MES, 725107

PART NUMBER	DESCRIPTION	BODY	SHELL	P/C	DIE
BNC					
RFB-1707-R	BNC Male Crimp Plug	N	N	G	T
RFB-1710-R*	BNC Male Right Angle Crimp Plug	N	N	G	T
RFB-1717-R*	BNC Female Crimp Rear Mount Bulkhead Jack	N	---	G	T
RFB-1724-R*	BNC Female Crimp Jack	N	---	G	T

Remee 1600

PART NUMBER	DESCRIPTION	BODY	SHELL	P/C	DIE
BNC					
RFB-1101-1X	BNC Male Clamp Solder Plug; UG-959A/U	N	N	G	D

* Special Order
0602

RFB-1107-1X	BNC Male Crimp Plug	N	N	G	D
RFB-1110-X	BNC Male R/A Crimp Plug	N	N	G	T
RFB-1124-1X	BNC Female Crimp Jack	N	---	G	D
7/16 Din					
RFD-1600-2-X	7/16 Din Male Clamp Plug Combo Straight or Right Angle	S	S	S	T
RFD-1605-2-X	7/16 Din Male Crimp Plug Combo Straight or Right Angle	S	S	S	T
RFD-1625-2-X	7/16 Din Female Clamp Jack Combo Straight or Right Angle	S	---	S	T
RFD-1630-2-X	7/16 Din Female Crimp Jack Combo Straight or Right Angle	S	---	S	T
RFD-1641-2-X*	7/16 Din Female 4 Hole Flange Clamp Combo Straight or R/A	S	---	S	T
FME					
RFE-6050-X	FME Female Crimp Jack	N	---	G	T
N					
RFN-1001-S	N Male Solder Plug	S	S	G	T
RFN-1004-1SX	N Male Clamp Plug	S	S	G	T
RFN-1007-2SX	N Male Crimp Plug	S	S	G	T
PART NUMBER	DESCRIPTION	BODY	SHELL	P/C	DIE
RFN-1009-X*	N Male Right Angle Crimp Plug	S	S	G	T
RFN-1009-X-04	N Male Right Angle Crimp Plug	N	N	G	T
RFN-1026-1X	N Female Clamp Jack	S	---	G	T
RFN-1029-SX	N Female Crimp Jack	S	---	G	T
TNC					
RFT-1201-1X	TNC Male Clamp Plug	N	N	G	T
RFT-1203-1X	TNC Male Crimp Plug	N	N	G	D
RFT-1213-X	TNC Female Crimp Rear Mount Bulkhead Jack	N	---	G	D
RFT-1217-X	TNC Female Crimp Jack	N	---	G	D
UHF					
RFU-500	UHF Male Solder Plug	S	N	S	Dap
RFU-501	UHF Male Clamp Plug	S	S	S	T
RFU-508-X	UHF Male Crimp Plug	N	N	S	Dap
Mini-UHF					
RFU-600-1X	Mini-UHF Male Crimp Plug	N	N	G	D
RFU-601-1X	Mini-UHF Female Crimp Jack	N	---	S	D
SMA					
RSA-3000-X	SMA Male Crimp Plug	N	N	G	T
RSA-3010-X	SMA Male Right Angle Crimp Plug	N	N	G	T
RSA-3050-X	SMA Female Crimp Jack	N	---	G	T
Reverse Thread					
RT-1203-1X	TNC Reverse Thread Male Crimp Plug	N	N	G	T

Cable assemblies using any REMEE PRODUCTS cable with any standard RF connector listed here are available in any specified length with short lead times. All flexible crimp cable assemblies are fabricated with soldered center contacts and adhesive lined shrink tubing for additional cable retention and strain relief.

More cable to connector cross references are available which include: Alpha, Antenna Specialist, BICCGeneral, Remee Products , Carol, Comm/Scope, Cushcraft Ultralink, CCI/Intercomp, Daburn, Dearborn, General/Guardian, GEPCO, Harbour Industries, Haverhill, Manhattan CDT,

* Special Order
0602

Micro-Coax, Military, National, Remeo, Saxton, Standard Wire, Thermax CDT, Times Microwave, WestPenn CDT.

Regarding any requirement you may have, please contact RF Industries at the following address:

7610 Miramar Road, San Diego, CA 92126-4202

(858) 549-6340

(800) 233-1728

Fax: (858) 549-6345

Email: sales@rfindustries.com